
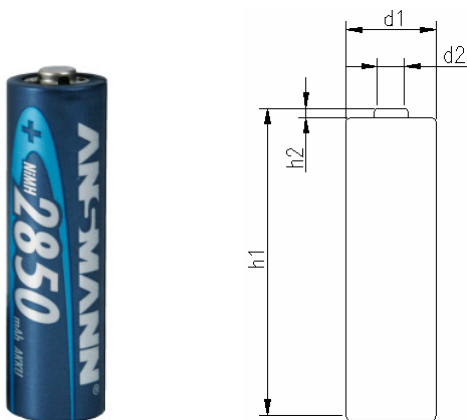
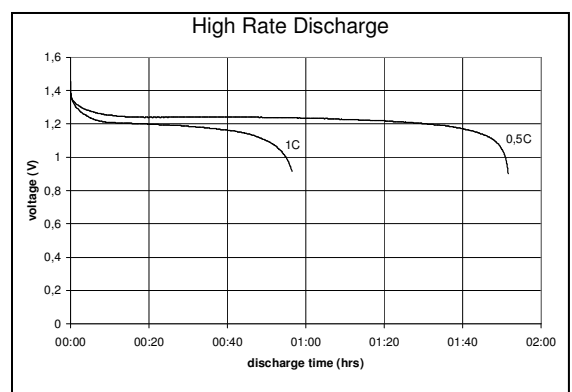
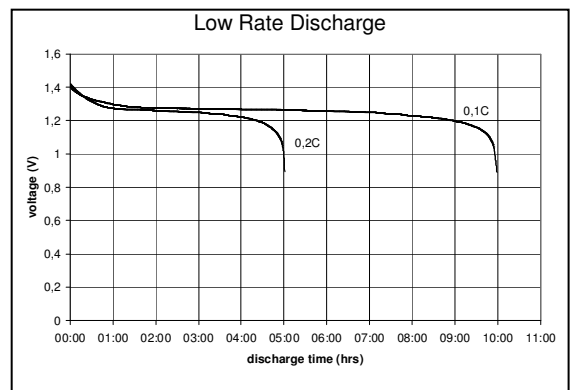
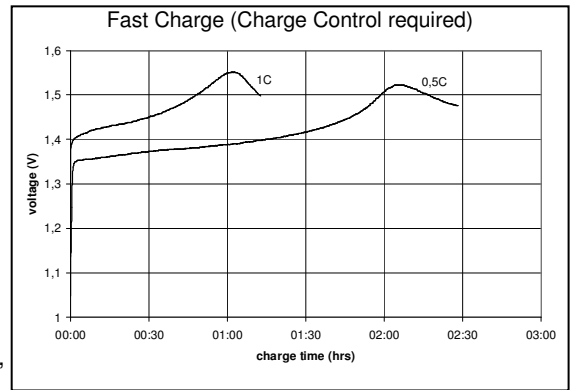


nominal voltage:	1,2V	conditions
max. charge voltage:	1,5V	at standard charge (0,1C / 20°C)
capacity		discharge at 0,2C
nominal :	2850mAh	discharge at 0,2C
minimum:	2500mAh	discharge at 1C
	2300mAh	1,0V end discharge voltage
		ambient temperature 20°C
max. continuous discharge current:	5400mA	ambient temperature 20....50°C
charge	charge current	charge time
standard charge:	270mA	16hrs at 20°C
quick charge:	575mA	5hrs
fast charge:	2700mA	1,15hrs
recommended charge termination control parameters:	-dV: 5....10mV dT/dt: 0,8....1°C per min TCO: 40...50°C	
trickle charge current:	25....100mA	(recommended)
continuous overcharge: (less than 1 year)	<125mA	no conspicuous deformation, no leakage
internal resistance:	≤25mOhms	at 1000Hz, battery fully charged
life expectancy:	>500 cycles	IEC standard
ambient temperature range:	0....50°C 10....45°C -20....60°C -20....50°C -20....40°C -20....35°C	standard charge fast charge discharge storage less than 30 days storage less than 3 months storage less than 1 year

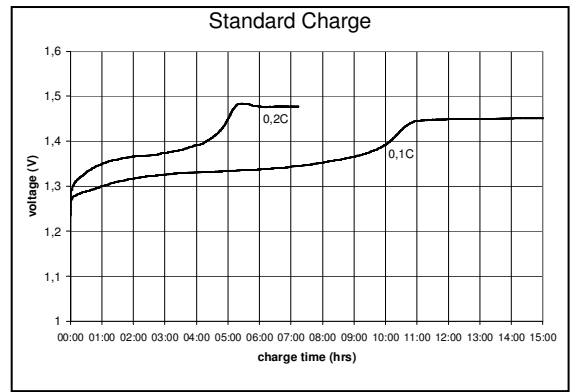

mechanical specifications

cell dimensions (with sleeve)	
diameter d1:	14,3 -0,4mm
diameter d2:	5,5 -0,5mm
height h1:	50,3 -0,5mm
height h2:	min. 1,0mm
weight:	approx. 30g

	specifications for model/type:	AA – NiMH 2850mAh
	Ansmann drawing number / part number:	5035201
	author / date:	Gramlich / 23.08.2007